

DS-K2804




DS-K2804	
Working Voltage	DC 12V
Power consumption	≤3.5W (without Load)
Processor	32-bit
RAM	8M
Uplink Communication Interface	TCP/IP
Downlink Communication Interface	Wiegand (W26/W34)
Storage	Storage for 10,000 Valid Cards Information and 50,000 Card Swiping Records
LED Indicator	Power Supply Status, Communication Status, Abnormal Status
Built-in Clock	Yes
Accessible Card Reader	4 Card Readers (Wiegand Interface)
Input Interface	Door Sensor x 4, Exit Button x 4, Case Input x 4
Output Interface	Lock Relay x 4, Alarm Relay x 4
Working Temperature	-20° C to 65° C (-4° F to 149° F)
Working Humidity	10% to 90%, non-condensing
Dimensions (L x W x H)	285mm x 237mm x 69mm (11.22" x 9.33" x 2.72")

FEATURES & NOTES

- ◆ 32-bit high-speed processor
- ◆ TCP/IP network communication
- ◆ Supports Wiegand interface for accessing card reader
- ◆ 10,000 cards information and 50,000 card swiping records
- ◆ Supports first card function, super card and super password function, online upgrade function and online remote control of the doors
- ◆ Supports time synchronization via NTP, manual or automatic method
- ◆ High/low temperature resistant design (-20°C to + 65°C)
- ◆ Client supports attendance function

APPEARANCE AND INTERFACES

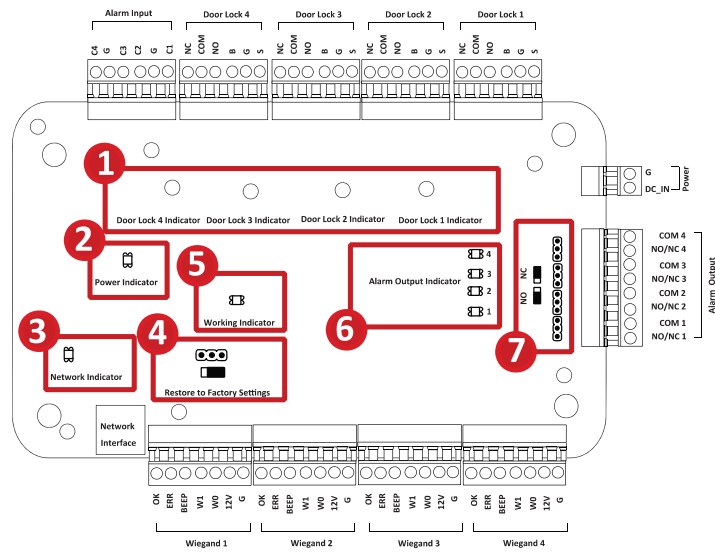

Index	Description	Index	Description
1	Door Lock 1/2/3/4 Indicator	5	Working Indicator
2	Power Indicator	6	Alarm Output Indicator
3	Network Indicator	7	Alarm Output (NO/NC) Jumper Cap
4	Jumper Cap for Restoring Factory Settings		