



# TA-AC304D-VBM


2MP CMOS Motorized Varifocal IR Bullet Camera



## KEY FEATURES

- 2MP CMOS Sensor
- HD1080P Video Output
- 0.1 Lux @ (f/1.2, AGC on), 0 Lux with IR
- 5mm to 50mm Motorized VF lens, auto focus
- True Day / Night
- OSD Menu, 3D-DNR, Slow shutter, Smart IR
- Up-the-Coax (HIKVISION-C, Pelco-C Protocol)
- Up to 300' IR Range

## DIMENSION

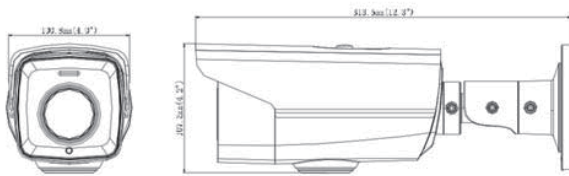

## ACCESSORIES (optional)



DS-1260ZJ  
Junction Box

TA-AC304D-VBM	
Image Sensor	2.0MP Progressive scan CMOS
Resolution	2688(H) x 1944(V)
Signal System	NTSC
Lens	5-50mm Motorized Lens
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 90°, Rotate: 0° to 360°
Day & Night	ICR
Minimum Illumination	0.028Lux@(F2.0,AGC ON), B/W: 0 Lux with IR
S/N Ratio	>62 dB
Synchronous System	Internal
Video Frame Rate	1080P@25/30 fps
Video Output	1 Turbo HD output
White Balance	ATW/AWC-SET/manual
BLC	Support
Electronic Shutter	1/25 (1/30) sec to 1/50,000 sec
Communication	TurboHD output: HIKVISION-C protocol
IR Distance	Up to 300'
Power Supply	24VAC ± 15% / 12VDC ± 15%
Weather Proof	IP66
Dimension (mm)	313.5 x 100.8 x 107.3 mm (12.34" x 3.97" x 4.22")
Weight (g)	1700g (59.97 ozs.)
Operating Conditions	-20° to 60°C / Humidity: 90% or less (non-condensing)