

# DS-KD-DIS

## Video Intercom Display Module




### KEY FEATURES


- 3.5-inch LCD screen with resolution 320 × 480p
- 4 physical buttons with backlight
- Up to 2000 contacts can be added to the device
- Stores and searches contact list
- Dials number and calls indoor station with keypad module
- Unlocks door by PIN code with keypad module
- Multiple languages

DS-KD-KP		
System Parameters	Processor	Embedded MCU Processor
	Storage	64 MB
	Flash	8 MB
Display Parameters	Screen	3.5-inch TFT LCD screen
	Resolution	320 × 480p
	Backlight	Supported
	Operation method	Physical buttons
Interfaces	RS-485	Module-connecting (1-input, 1-output)
	Power input	12 VDC (From the other module)
General	Power output	12 VDC (For the other module)
	Physical buttons	4 (Up, Down, OK, Back)
	Debug port	1
	Power consumption	≤3 W
	Working temperature	-4° F to 140° F
	Working humidity	10% to 95%
	IP protection level	IP65

### TYPICAL APPLICATION

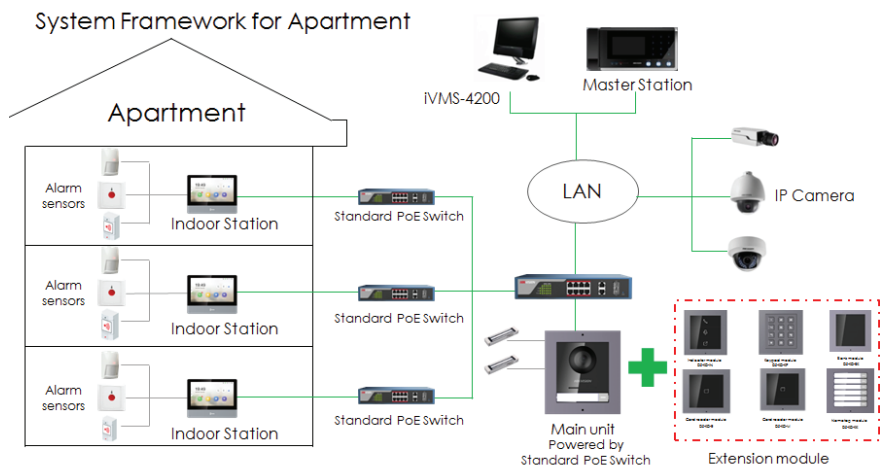

### APPEARANCE AND INTERFACE

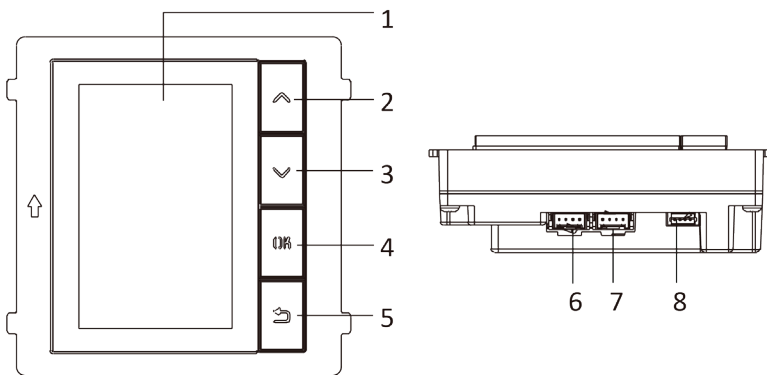

1	Screen	5	Back Button
2	Up Button	6	Module-connecting Interface(output)
3	Back Button	7	Module-connecting Interface(input)
4	Confirm Button	8	Debug Port