


# DS-KD-KK

## Video Intercom Nametag Module




### KEY FEATURES


- Dial the resident at one-touch
- Backlight compensation
- Easy and extend

DS-KD-KK		
System Parameters	Processor	Embedded MCU Processor
	Operation method	Physical Button
Interfaces	Module-connecting	2(1 Input, 1 Output)
	Debug	1
General	Physical button	6
	DIP switch	8
	Power supply	Powered by DS-KD8003-IME1
	Power consumption	≤2 W
	Working temperature	-40° F to 140° F
	Working humidity	10% to 95%
	IP protection level	IP65
	Installation	Flush Mounting, Surface Mountin
Dimensions	3.87" × 3.95" × 1.33"	

### TYPICAL APPLICATION

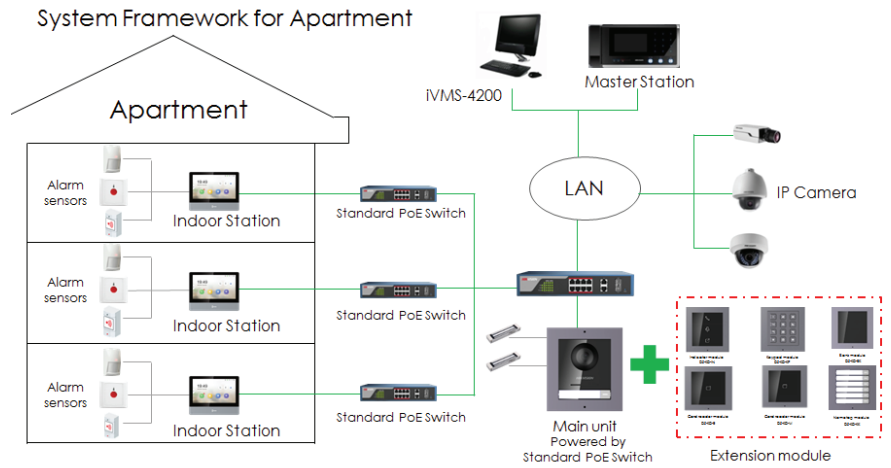

### APPEARANCE AND INTERFACE

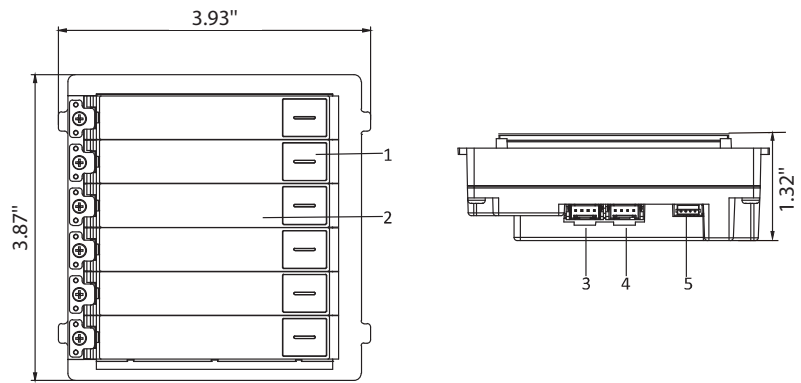

1	Call Button	4	Module-connecting Interface(input)
2	Name Tag	5	Debug
3	Module-connecting Interface(output)		