

THK-NC304-WDA


4MP WDR Mini Dome Network Camera



KEY FEATURES

- Up to 4 Megapixel High Resolution
- 4mm Fixed Lens
- 120dB WDR
- 3D DNR
- Up to 10m IR range
- IP66 Weather-proof protection & vandal-proof protection
- 12V DC±10% & PoE(802.3af)
- S: Built-in microphone, Audio Output, Alarm IO
- Mobile Monitoring via EZVIZ P2P or iVMS-4500
- Dual video streams

DIMENSION

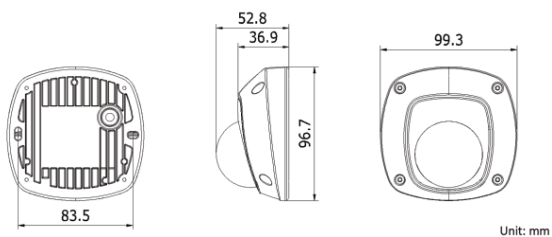

TA-NC304-WDA			
Camera	Image Sensor	1/3" Progressive Scan CMOS	
	Min. Illumination	0.01Lux@(F1.2, AGC ON), 0 Lux with IR	
	Shutter Speed	1/3s to 1/10,000s	
	Lens Mount	M14	
	Day & Night	IR cut filter with auto switch	
	DNR	3D DNR	
	Wide Dynamic Range	120dB	
Compression Standard	Video Compression	H.264 / MJPEG	
	H.264 Type	Main Profile	
	Video Bit Rate	256 Kbps ~ 16 Mbps	
	Audio Compression (-S)	G.711/G.722.1/G.726/MP2L2 *only for 5 models	
	Audio Bit Rate (-S)	64Kbps (G.711) / 16Kbps (G.722.1) / 16Kbps (G.726) / 32-128Kbps (MP2L2) *only for S models	
	Dual Stream	Support	
	Image	Max. Resolution	2688 x 1520
Frame Rate		50Hz: 20fps (2688x1520), 25fps (1920x1080), 25fps (1280x720) 60Hz: 20fps (2688x1520), 30fps (1920x1080), 30fps (1280x720)	
Image Setting		Rotate mode, Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser	
BLC		Support, zone configurable	
ROI Codec		Support	
Network		Network Storage	NAS (Support NFS,SMB/CIFS) ANR
		Alarm Trigger	Motion detection, Tampering alarm, Network disconnect, IP address conflict, Storage exception
	Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS. RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour	
	Security	One-key reset, Flash-prevention, dual stream, heartbeat, mirror, password protection, privacy mask, watermark, IP address filtering, Anonymous access	
	Standard	ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI	
	Interface	Communication Interface	1 RJ45 10M/100M Ethernet port
		On-board storage	Built-in Micro SD/SDHC/SDXC slot, up to 128GB
Alarm Interface		1x alarm I/O *only for S models	
Audio Interface		Built-in microphone and 1x audio output *only for S models	
General	Operating Conditions	-30° to +60° C (-22° to 140° F), Humidity 95% or less (non-condensing)	
	Power Supply	DC12V±10%, PoE (802.3af)	
	Power Consumption	Max. 5W	
	IR Range	Approx. 10 meters	
	Ingress Protection	IP66	
	Impact Protection	IEC60068 - 274Eh, 20J; EN50102, up to IK08	
	Dimensions (WxDxH)	99.3 x 96.7 x 52.8mm	
Weight (w/o hard disk)	600g (1.32lbs)		