

Transfer Server



MODEL **TS-T880N2**

KEY FEATURES

- High-performance X86 hardware platform, stable and reliable
- Preset software before delivery; All-in-One simple deployment
- Support the device access of TVT and other famous manufacturers in the industry
- Support ONVIF protocol
- Support device auto-report
- Support adding devices through IP address, IP address segment, URL, domain name and serial number
- Automatically search devices and quickly adding devices
- Support standard, widescreen and customized screen display modes
- 880Mbps stream access and transfer per device
- 4 gigabit Ethernet ports, powerful network redundancy capability



CMS (Remote Viewing Apps) --- NVMS (PC / MAC)



Mobile App --- Super Live Plus (ANDROID / IOS)


TS-T880N2

SPECIFICATIONS

Model	TS-T880N2
CPU	Intel Xeon Processor E3
OS	Ubuntu20.04
Memory	8GB DDR4 ECC, up to 64GB
Network Card	Dual gigabit ports I350-T2 + Intel210-AT dual gigabit Ethernet ports
HDD	1 built-in Kingston SSD/120G/SATA/6Gb/s/2.5inch/SUV400S37
PCI Expansion	1*PCI-E3.0*8; 1*PCI-E3.0*8(X4); 1*PCI-E3.0*16(X8)
Interfaces	"VGA×1, HDMI×1, USB×6 (front panel: USB2.0×2, real panel: USB3.0×4), network interface×4; DVI×1, remote management port×1; audio input×2; audio output×2"
Incoming Bandwidth	880Mbps
Outgoing Bandwidth	880Mbps
Max. Number of Channel Access	2048CH

Max. Number of Device Access	300NVRs/500IPCs
Max. Number of Decoder Access	128CH
Power	100~240V-6~3A/50~60Hz
Power Consumption	≤300 (with HDD)
Working Environment	Working: 10°C ~ 35°C ; Standby: -40°C ~ +70°C (ambient)
Relative Humidity	Standby: 95%, 25°C ~ 30°C (non-condensing)
Noise	Working: <50dBA; 6.2BA (<28°C)
Gross Weight	Approx. 12KG
Dimensions(mm)	430 x 487 x 44 (W x D x H)
Installation	Standard 19 inch rack mount

DIMENSIONS

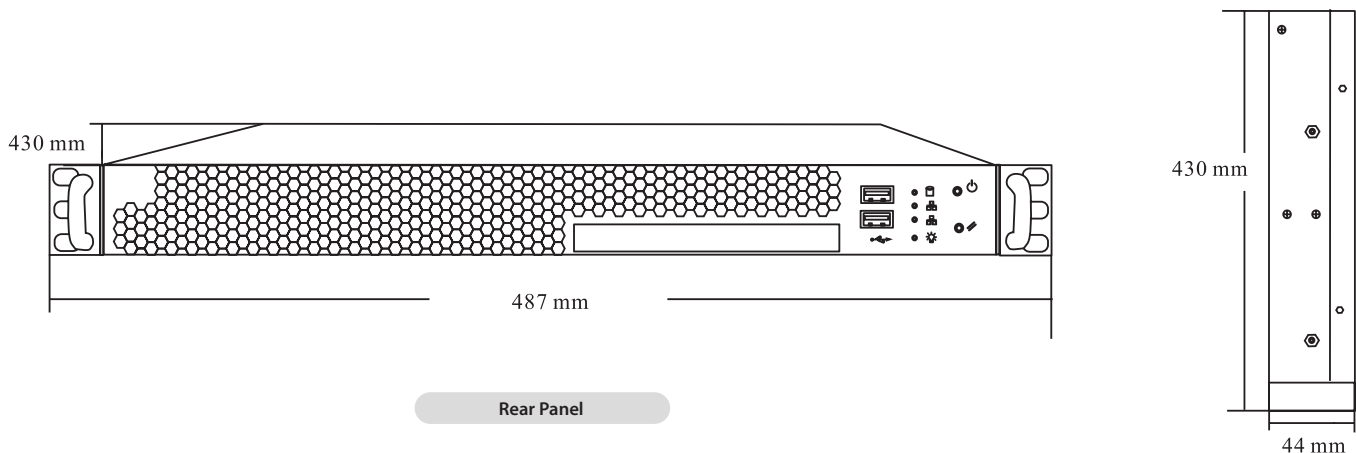

Rear Panel