


Face Recognition Terminal

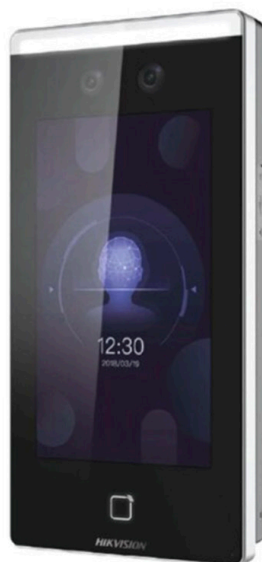

MODEL **DS-K1T671TMW**

KEY FEATURES

- 7-inch LCD touch screen
- 2 MP wide-angle dual-lens
- Adjusts supplement light brightness manually
- Face recognition in dark environment
- Face recognition distance: 0.3 to 3 m
- Suggested height for face recognition: between 1.4 m and 1.9 m
- Deep learning algorithm
- 20,000 face capacity, 5,000 fingerprint capacity, and 100,000 event capacity
- Multiple authentication modes
- Face recognition duration < 0.2 s/User; face recognition accuracy rate $\geq 99\%$
- Imports card and user data to the device via TCP/IP communication
- Stand-alone operation
- Transmits data to the client software via TCP/IP communication and saves the data on the client software
- Capture linkage and captured pictures saving
- Imports data to the device from the client software
- Manage, search and set device data after logging in the device locally
- Connects to one external card reader or access controller via RS-485 protocol
- Connects to external access controller or Wiegand card reader via Wiegand protocol
- Connects to secure door control unit via RS-485 protocol to avoid the door opening when the terminal is destroyed
- Two-way audio with client software, indoor station, and master station
- Remote live view via RTSP protocol; encoding mode: H.264
- NTP, manually time synchronization, and auto synchronization
- Audio prompt
- Watchdog design and tamper function
- Supports 6 attendance status, including check in, check out, break in, break out, overtime in, overtime out

DS-K1T671TMW

Face Recognition Terminal

SPECIFICATIONS

Model	DS-K1T671TMW
Operation Sytem	Linux
Screen	7 inch touch screen Ratio: 16:9 Resolution: 1024 × 600
Camera	2 MO dual-lens camera, WDR
Indicator	Support
Recognition mode	Face: 1:1 and 1:N Fingerprint: 1:1 and 1:N
Face capacity	20,000
Face recognition duration	< 0.2s per person
Face recognition distance	1 to 10ft
Card capacity	50,000
Card type	M1 card
Card swiping duration	< 1s
Card swiping distance	0 to 2 inches
Event capacity	100,000
Interface	Network ×1, RS-485 ×1, Wiegand ×1, USB ×1, alarm output ×1, alarm input ×2, lock ×1, door contact ×1, exit button ×1, tamper ×1
Network	10/100/1000 Mbps self-adaptive
Wi-Fi	Support
Working voltage	12 VDC/3A
Working temperature	-22 °F to +140 °F
Working humidity	0 to 90% (No condensing)
Protection level	IP65
Tamper	Support

DIMENSION

