

TA-AC318-FD4



8 MP Turret Camera



KEY FEATURES

- 8.29MP High-performance CMOS
- 3840 x 2160 resolution
- 2.8mm Fixed Lens
- EXIR 2.0, smart IR
- Up to 180ft IR distance
- 4-in-1 Video Outputs (Switchable TVI/AHD/CVI/CVBS)
- IP67
- Up the Coax (HIKVISION-C)

DIMENSIONS

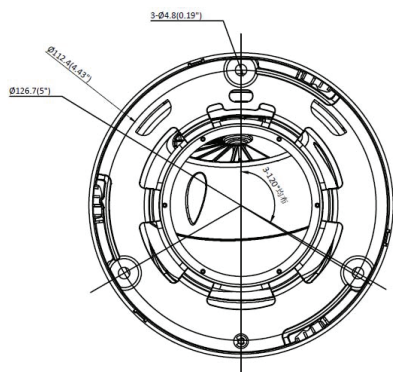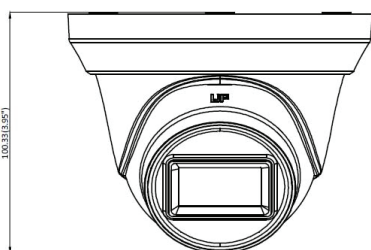

TA-AC318-FD4		
Camera	Image Sensor	8.29 megapixel progressive scan CMOS
	Signal System	PAL / NTSC
	Frame Rate	TVI: 8MP@12.5fps, 8MP@15fps, 5MP@20fps, 4MP@25fps, 4MP@30fps, 2MP@25fps, 2MP@30fps CVI: 8mp@12.5fps, 8MP@15fps AHD: 8MP@12.5fps, 8MP@15fps CVBS: 960H P/N
	Resolution	3840(H) x 2160(V)
	Min. Illumination	Color: 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR
	Shutter Time	PAL: 1/12.5s to 1/50,000s, NTSC: 1/15s to 1/50,000s
	Lens	2.8mm Fixed Lens
	Horizontal FOV	102.2° (2.8 mm), 79° (3.6 mm), 50.8° (6 mm)
	Lens Mount	M16
	Day & Night	IR cut filter
	Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360°
	Synchronization	Internal Synchronization
	DWDR	105dB
Menu	AGC	Yes
	Day / Night Mode	Auto / Color / BW (Black and White)
	White Balance	Auto / Manual
	BLC	Yes
	Language	English
	Functions	Functions Brightness, Sharpness, DNR, Mirror, Smart IR
Interface	Video Output	1 HD analog output
	Switch Button	TVI/AHD/CVI/CVBS
General	Operating Conditions	-40 °F to 140 °F, humidity: 90% or less (non-condensation)
	Power Supply	12 VDC ±25%
	Protection Level	IP67
	Material	Metal
	IR Range	Up to 200ft
	Communications	Up the coax, Protocol: UTC-C (TVI output)
	Dimensions	Ø 109.82 mm × 91.03 mm (Ø 4.32" × 3.6")
	Weight	320 g (0.71 lb.)