


# 5MP IR Water-Proof Turret Network Camera



## MODEL **TI-NCT05XD-AN**

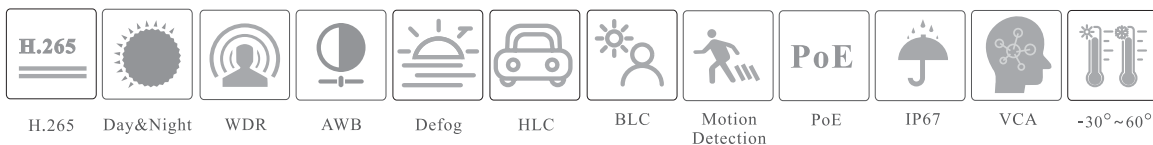

### KEY FEATURES

- 5MP ( 2592 × 1944 ) H.265 full real time coding
- Max. resolution: 2592 × 1944
- ICR auto switch, true day / night vision
- 20~30m IR night view distance
- 3D DNR, true WDR, HLC, BLC, Defog, NIR, Smart IR and ROI coding
- Support image distortion correction
- Built-in micro SD card slot, up to 256GB
- DC12V/PoE power supply
- IP 67 ingress protection
- Support three streams
- P2P function optional
- Support remote monitoring by smart phones & tablet PCs with iOS and Android OS
- Intelligent analytics



🖥️ CMS (Remote Viewing Apps) --- NVMS (PC / MAC)

📱 Mobile App --- Super Live Plus (ANDROID / IOS)

# TI-NCT05XD-AN


## 5MP Network IR Water-Proof Dome Camera

### SPECIFICATIONS

Specifications	Model	TI-NCT05XD-AN
<b>Camera</b>		
Image Sensor		1 / 2.7" CMOS
Image Size		2592 × 1944
Electronic Shutter		1s ~ 1 / 100000 s
Iris Type		Fixed Iris
Min. Illumination		0.02 lux@F1.6,AGC ON; 0 lux with IR 0.007 lux@F1.2,AGC ON; 0 lux with IR
Lens		2.8 mm@F1.6, horizontal FoV: 98.5°; vertical FoV: 82.1°; diagonal FoV:110.9° 3.6 mm@F1.6, horizontal FoV: 81.4°; vertical FoV: 65.7°; diagonal FoV:94.2°
Focus		Fixed
Lens Mount		M12
Day & Night		ICR
Wide Dynamic Range		120dB
BLC		Yes
HLC		Yes
Defog		Yes
Digital NR		3D DNR
Angle Adjustment		Pan: 0°~360° ; Tilt: 0°~75° ; Rotation: 0°~360°
<b>Image</b>		
Video Compression		H.265+ / H.265 / H.264+ / H.264 / MJPEG
H.264 Compression Standard		Baseline Profile/Main Profile/High Profile
Resolution		5MP(2592×1944), 4MP(2592×1520), 2K(2560×1440), 3MP(2304×1296), 1080P(1920×1080), 720P(1280×720), D1, CIF, 480×240
Main Stream		5MP/ 4MP/ 2K / 3MP / 1080P / 720P ( 60Hz : 1 ~ 30fps; 50Hz: 1~25fps ) HFR mode: 1080P / 720P ( 60Hz : 1 ~ 60fps; 50Hz: 1~50fps )
Sub Stream		720P/D1/CIF ( 60Hz : 1~30fps; 50Hz: 1~25fps )
Third Stream		D1/CIF/480×240 ( 60Hz : 1~30fps; 50Hz: 1~25fps )
Bit Rate		64 Kbps ~ 8 Mbps
Bit Rate Type		VBR / CBR
Audio Compression		G711A / U
Image Settings		ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, NR, etc. adjustable through client software or web browser
ROI		Each ROI to be configured separately

<b>Interfaces</b>	
Network	RJ45
Video Output	No
Audio	1CH audio input; 1 CH built-in MIC
Storage	Built-in micro SD card slot; up to 256GB
Reset	Yes
Alarm	No
<b>Intelligent Analytics (Smart Events)</b>	
Perimeter Protection	Line crossing, intrusion (human/motor vehicle/ non-motor vehicle classification)
Target Counting	Line crossing human/motor vehicle/non-motor vehicle counting
Exception Detection	Scene change, video blur and video color cast detection
Face Detection	Face detection and face capture
<b>Functions</b>	
Remote Monitoring	Web browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, ICMP, IGMP, PPPoE, DDNS, SMTP, FTP, SNMP,HTTP, 802.1x, UPnP, HTTPs, QoS
Interface Protocol	ONVIF
Storage	Network remote storage; micro SD card storage
Smart Alarm	Motion detection, SD card error, SD card full
General Function	Watermark, IP address filtering, video mask, heartbeat, illegal login lock, image distortion correction
PoE	Yes , IEEE802.3af
IR Distance	20 ~ 30 m
Ingress Protection	IP67
<b>Others</b>	
Power Supply	DC12V/PoE
Power Consumption	< 7W
Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F) Humidity: less than 95 % (non-condensing)
Dimensions ( mm )	Ø 94.6 × 82.8
Weight ( net )	Approx. 0.46KG
Installation	Ceiling mounting; Wall mounting
Certificate	CE, FCC
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)

### DIMENSIONS

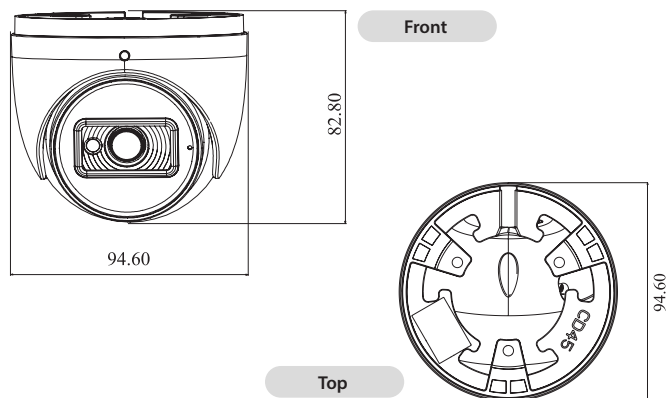

### ACCESSORIES (Optional)

