

4CH PoE Network Video

4CH POE Network Video Recorder



MODEL **THK-NR32P4-4C**



KEY FEATURES

- Upto4-chIPcamerainputs
- H.265+/H.265/H.264+/H.264videoformats
- Upto1-ch@8MP/5-ch@1080pdecodingcapacity
- Upto40Mbpsincomingbandwidth
- H.265+compressioneffectivelyreducesthestoragespacebyupto75%
- ProvidesimultaneousHDMIandVGAoutputs
- HDMIvideooutputatupto4Kresolution
- 1SATAinterfaceforHDDconnection (upto8TBcapacityperHDD)
- Smartsearch/smartplaybacktoimprovetheplaybackefficiency
- SupportmultipleVCA(VideoContentAnalytics)events
- Configurable specialcamerasmartfunctions,suchasVCAdetection(motion,linecrossing,intrusion,etc.)andANPR
- 4independentPoEnetworkinterfaces
- 1self-adaptive10/100MbpsEthernetinterface
- Hik-Connectforeasynetworkmanagement

THK-NR32P4-4C

4CH PoE Network Video


SPECIFICATIONS

N/A	THK-NR32P4-4C
Video and Audio	
IP Video input	4-ch Upto8MPresolution
Incoming bandwidth	40Mbps
Outgoing bandwidth	80Mbps
HDMI output	1-ch,4K(4096x2160)/30Hz,4K(3840x2160)/30Hz,2K(2560x1440)/60Hz,1920x1080/60Hz,1600x1200/60Hz,1280x1024/60Hz,1280x720/60Hz
VGA output	1-ch,1920x1080/60Hz,1280x1024/60Hz,1280x720/60Hz
Video output mode	HDMI/VGAsimultaneousoutput
CVBS output	N/A
Audio output	1-ch,RCA(Linear,1KΩ)
Two-way audio input	1-ch,RCA(2.0Vp-p,1KΩ,usingtheaudioinput)
Decoding	
Decoding format	H.265+/H.265/H.264+/H.264
Recording resolution	8MP/6MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Synchronous playback	4-ch
Capability	1-ch@8MP(30fps)/5-ch@1080p(30fps)
Stream type	Video,Video&Audio
Audio compression	G.711ulaw/G.711alaw/G.722/G.726
Network	
Remote connection	16
Network protocol	TCP/IP,DHCP,IPv4,IPv6,DNS,DDNS,NTP,RTSP,SADP,SMTP,SNMP,NFS,iSCSI,ISUP,UPnP™,HTTP,HTTPS
Network interface	1,RJ-4510/100Mbpsself-adaptiveEthernetinterface
PoE	
Interface	4,RJ-4510/100Mbpsself-adaptiveEthernetinterface
Power	≤50W
Supported standard	IEEE802.3af/at
Auxiliary Interface	
SATA	1SATAinterface
Capacity	Upto8TBcapacityforeachdisk
Alarm in / out ¹	N/A(4/1isoptional)
USB interface	Frontpanel:1xUSB2.0;Rearpanel:1xUSB2.0
General	
Power supply	48VDC,1.35A
Consumption (without HDD and PoE off)	≤10W
Working temperature	14°Fto131°F (-10°Cto55°C)
Working humidity	10%to90%
Dimension (W x D x H)	320x240x48mm(12.6"x9.4"x1.9")
Weight (without HDD)	≤1kg(2.2lb)
Certification	
FCC	Part15SubpartB,ANSIC63.4-2014

THK-NR32P4-4C

4CH PoE Network Video

PHYSICAL INTERFACE

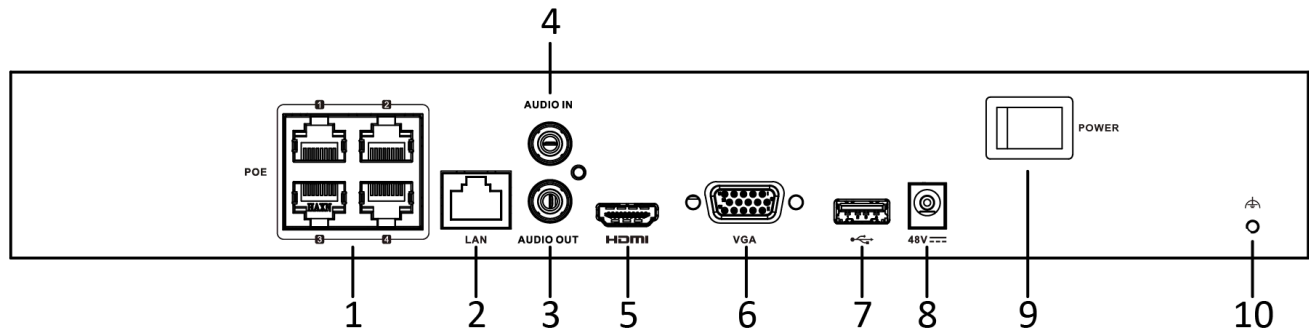

No.	DESCRIPTION
1	PoEInterfaces
2	LANInterface
3	AUDIOOUT
4	AUDIOIN
5	HDMIInterface

No.	DESCRIPTION
6	VGAOutput(DB9Connector)
7	USBInterface
8	PowerSupply
9	PowerSwitch
10	GND