

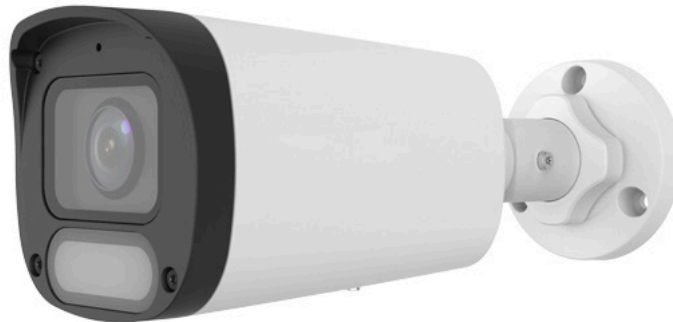


5MP Fixed Bullet Network Camera

NIGHT WATCH



MODEL **WM-NC625N-MB**



KEY FEATURES

- 1/1.8" CMOS Sensor
- 5 MP Resolution (2880 × 1620)@25/20 fps (16:9)
- F1.0 Large aperture lens
- 24 Hour full color images
- Ultra Low Lux : 0.0003 Lux (F1.0, AGC ON)
- H.265, H.264, MJPEG
- 120 dB True WDR technology enables clear image in strong light scene
- White light, up to 30 m (98.4 ft.) warm light distance
- 2.8mm Fixed
- Low Power Consumption 2.8W Max
- Micro SD, up to 512 GB
- Water proof, IP67
- Built in MIC

WM-NC625N-MB

5MP Fixed Bullet Network Camera

SPECIFICATIONS

| Model | WM-NCWM-NC625N-MBB |
|------------------------------------|--|
| IP Camera | |
| Max Resolution | 5 Megapixel |
| Sensor | 1/1.8" CMOS |
| Min. Illumination | Color: 0.0003 Lux (F1.0, AGC ON) |
| Shutter | Auto/Manual, 1 ~ 1/100000s |
| Adjustment Angle | Pan: 0° to 360°, Tilt: 0° to 90°, Rotate: 0° to 360° |
| S/N | >52 dB |
| WDR | 120 dB |
| Lens | |
| Focal Length | 2.8 mm |
| Iris Type | Fixed |
| Iris | F1.0 |
| Field of View (H) | 124.3° |
| Field of View (V) | 64.1° |
| Field of View (D) | 135.0° |
| Lens Type | Fixed |
| DORI | |
| DORI Distance (Lens) | 2.8 mm |
| DORI Distance (Detect) | 142.4 ft (43.4 m) |
| DORI Distance (Observe) | 57.1 ft (17.4 m) |
| DORI Distance (Recognize) | 28.5 ft (8.7 m) |
| DORI Distance (Identify) | 14.1 ft (4.3 m) |
| Illuminator | |
| Supplemental Light | Warm light |
| Illumination Distance (Warm Light) | 98.4 ft (30 m) |
| Light On/Off Control | Auto/Manual |
| Video | |
| Video Compression | H.265, H.264, MJPEG |
| H.264 Code Profile | Baseline profile, Main profile, High profile |
| Frame Rate | Main Stream: 5 MP (2888 × 1620), max. 25 fps; 4 MP (2688 × 1520), max. 25 fps; 4 MP (2560 × 1440), max. 25 fps; 3 MP (2304 × 1296), max. 30 fps; 1080P (1920 × 1080), max. 30 fps; Sub Stream: 720P (1280 × 720), max. 30 fps; D1 (720 × 576), max. 30 fps; 640 × 360, max. 30 fps |
| Video Bit Rate | 128 Kbps to 6144 Kbps |
| OSD | Up to 4 OSDs |
| Privacy Mask | Up to 4 areas |

WM-NC625N-MB

5MP Fixed Bullet Network Camera

SPECIFICATIONS

| Model | WM-NC625N-MB |
|-------------------------|--|
| Video | |
| ROI | Up to 8 areas |
| Video Stream | Dual streams |
| Image | |
| White Balance | Auto, Outdoor, Fine tune, Sodium lamp, Locked, Auto2 |
| Digital Noise Reduction | 2D/3D DNR |
| Smart Illumination | Support |
| Flip | Normal, Flip vertical, Flip horizontal, 180°, 90° Clockwise, 90° Anti clockwise |
| HLC | Support |
| BLC | Support |
| Defog | Digital defog |
| Events | |
| Basic Detection | Motion detection, Ultra motion detection, Tampering alarm, Audio detection Intrusion, crossline detection (both detection are based on human body and vehicle detection) |
| General Function | Watermark, IP address filtering, Access policy, ARP protection, RTSP authentication, User authentication, HTTP authentication |
| Audio | |
| Audio Compression | G.711U, G.711A |
| Audio Bitrate | 64 Kbps |
| Two way Audio | N/A |
| Suppression | Support |
| Sampling Rate | 8 kHz |
| Storage | |
| Edge Storage | MicroSD, up to 512 GB |
| Network Storage | NAS (NFS) |
| Network | |
| Protocols | IPv4, IPv6, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, RTMP, SSL/TLS |
| Compatible Integration | ONVIF (Profile S, Profile G, Profile T), API, SDK |
| User/Host | Up to 32 users, 2 user levels: administrator and common user |
| Security | Password Protection, Strong Password, HTTPS Encryption, Export Operation Logs, Basic and Digest Authentication for RTSP, Digest Authentication for HTTP, TLS 1.2, WSSE and Digest Authentication for ONVIF |
| Web Browser | Plug in required live view: IE 10+, Chrome 45+, Firefox 52+, Edge 79+, Plug in free live view: Chrome 57+, Firefox 58+, Edge 16+ |
| Interface | |
| Audio I/O | N/A |
| Alarm I/O | N/A |
| Serial Port | N/A |
| Built in Mic | Support |
| Built in Speaker | N/A |
| WIFI | N/A |
| Network | 1 × RJ45 10 M/100 M Base TX Ethernet |
| Video Output | N/A |

WM-NC625N-MB

5MP Fixed Bullet Network Camera

SPECIFICATIONS

| Model | WM-NC625N-MB |
|----------------------|--|
| Certification | |
| EMC | CE EMC (EN 55032, EN 61000 3 3, EN IEC 61000 3 2, EN 55035) FCC (FCC 47 CFR part15 B) |
| Protection | IP67 (IEC 60529) |
| General | |
| Power | DC 12 V±25%, PoE (IEEE 802.3af) |
| Power Consumption | Max. 2.8 W |
| Power Interface | Ø5.5 mm coaxial power plug |
| Dimensions | (8.1" × 2.9" × 2.9" (206 mm × 73 mm × 73 mm) (L × W × H) |
| Weight | 1.06 lb(0.48 kg) |
| Material | Graphene + Metal |
| Working Environment | 22 °F to 140 °F (30 °C to 60 °C), Humidity: ≤ 95% RH (non condensing) |
| Storage Environment | 22 °F to 140 °F (30 °C to 60 °C), Humidity: ≤ 95% RH (non condensing) |
| Surge Protection | 4 KV |
| Reset Button | Support |

DIMENSIONS

