

1ch 10/100M PoE Extender




MODEL **TI-POE-EXPT**

KEY FEATURES

- Compatible with IEEE802.3af and IEEE802.3at
- Extends the range of PoE and Ethernet an additional 300ft
- No additional power required
- Automatically detects and protects PoE equipments from being damaged by incorrect installation
- Compact size, Wall-Mountable design
- Easy plug-and-play installation
- EMI standards complies with FCC, CE class B

APPLICATION

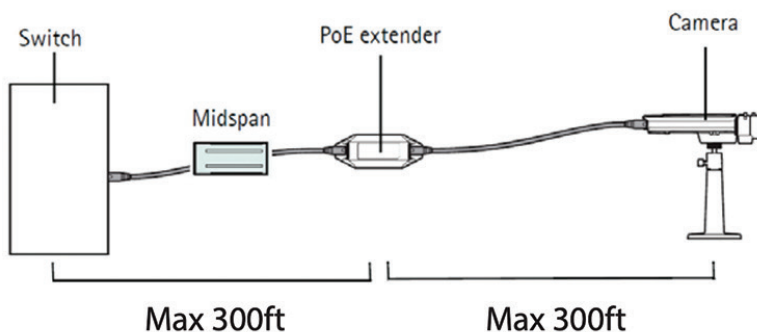

TI-POE-EXPT

1ch 10/100M PoE Extender

SPECIFICATIONS

Model	TI-POE-EXPT
No. of channels	1
Pass Through Data Rates	10/100/1000Mbps half/full duplex
Power over Ethernet input	Pin Assignment and Polarity: Both 1/2 (-), 3/6 (+), and 7/8 (-), 4/5 (+)
Power over Ethernet Output	Pin Assignment and Polarity: 1/2 (-), 3/6 (+) Output Power : up to 22W
Indicators	LED indicator are located on the RJ45 connector Power indicator : PoE enabled Network indicator : Link/Act
Connectors	Shielded RJ-45, eia 568A and 568B
Network cables	Shielded category 5 (or higher)
Dimensions	145 mm x 60 mm x 40 mm
Mounting	Wall of shelf
Environment	Indoor
Environmental Conditions	Operating Ambient Temperature : - 40°C C To 55°C Operating Humidity : Maximum 90%RH, Non-condensing Storage Temperature : - 40°C C To 70°C Storage Humidity : Maximum 95%, Non-condensing
Regulatory Compliance	IEEE 802.3af (PoE0), IEEE 802.3at (PoE +)